


CORTO RADIATORS

Corto, the Radiator Classic, is the creation of Louis Courtot—a French artist engineer long affiliated with our Company. He labored for years to realize the ambition which he has expressed in these words:

“My ambition is to design a radiator of such refined and artistic elegance, one so repeating the chaste lines of classic architecture, that in its finished state it may justly be regarded as an object of art. It must be of lesser proportions

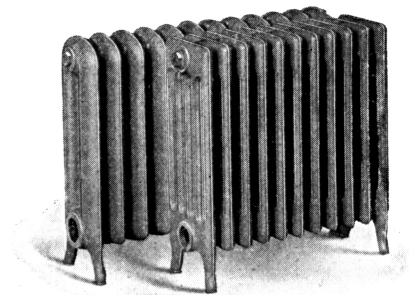

Showing space saved by Corto
over usual type of radiation.

than any existing radiator, yet its warming power must equal, if not exceed that of the best now known.”

The Corto embodies completely each element of M. Courtot's ideal. It occupies approximately thirty per cent less space than any other radiator of similar heating power. Each year it continues to gain favor with the heating profession and among discriminating home owners.

CORTO RADIATORS

For Steam or Water

| No. of Sections | * Length 2 in. per Sec. | NOMINAL HEATING SURFACE—SQUARE FEET | | | | | |
|-----------------|-------------------------|-------------------------------------|------------------------------------|------------------------------------|----------------------------------|------------------------------------|------------------------------------|
| | | 38-in. Height 4 ½ sq. ft. per Sec. | 34 ½-in. Height 4 sq. ft. per Sec. | 31-in. Height 3 ½ sq. ft. per Sec. | 27-in. Height 3 sq. ft. per Sec. | 23-in. Height 2 ½ sq. ft. per Sec. | 19 ½-in. Height 2 sq. ft. per Sec. |
| 2 | 4 | 9 | 8 | 7 | 6 | 5 | 4 |
| 3 | 6 | 13½ | 12 | 10½ | 9 | 7½ | 6 |
| 4 | 8 | 18 | 16 | 14 | 12 | 10 | 8 |
| 5 | 10 | 22½ | 20 | 17½ | 15 | 12½ | 10 |
| 6 | 12 | 27 | 24 | 21 | 18 | 15 | 12 |
| 7 | 14 | 31½ | 28 | 24½ | 21 | 17½ | 14 |
| 8 | 16 | 36 | 32 | 28 | 24 | 20 | 16 |
| 9 | 18 | 40½ | 36 | 31½ | 27 | 22½ | 18 |
| 10 | 20 | 45 | 40 | 35 | 30 | 25 | 20 |
| 11 | 22 | 49½ | 44 | 38½ | 33 | 27½ | 22 |
| 12 | 24 | 54 | 48 | 42 | 36 | 30 | 24 |
| 13 | 26 | 58½ | 52 | 45½ | 39 | 32½ | 26 |
| 14 | 28 | 63 | 56 | 49 | 42 | 35 | 28 |
| 15 | 30 | 67½ | 60 | 52½ | 45 | 37½ | 30 |
| 16 | 32 | 72 | 64 | 56 | 48 | 40 | 32 |
| 17 | 34 | 76½ | 68 | 59½ | 51 | 42½ | 34 |
| 18 | 36 | 81 | 72 | 63 | 54 | 45 | 36 |
| 19 | 38 | 85½ | 76 | 66½ | 57 | 47½ | 38 |
| 20 | 40 | 90 | 80 | 70 | 60 | 50 | 40 |
| 21 | 42 | 94½ | 84 | 73½ | 63 | 52½ | 42 |
| 22 | 44 | 99 | 88 | 77 | 66 | 55 | 44 |
| 23 | 46 | 103½ | 92 | 80½ | 69 | 57½ | 46 |
| 24 | 48 | 108 | 96 | 84 | 72 | 60 | 48 |
| 25 | 50 | 112½ | 100 | 87½ | 75 | 62½ | 50 |
| 26 | 52 | 117 | 104 | 91 | 78 | 65 | 52 |
| 27 | 54 | 121½ | 108 | 94½ | 81 | 67½ | 54 |
| 28 | 56 | 126 | 112 | 98 | 84 | 70 | 56 |
| 29 | 58 | 130½ | 116 | 101½ | 87 | 72½ | 58 |
| 30 | 60 | 135 | 120 | 105 | 90 | 75 | 60 |
| 31 | 62 | 139½ | 124 | 108½ | 93 | 77½ | 62 |
| 32 | 64 | 144 | 128 | 112 | 96 | 80 | 64 |

TAPPINGS: 1½ inches top and bottom and bushed for water or steam.

CONNECTIONS: Extra-heavy right and left threaded nipples.

MEASUREMENTS: For center of tappings to floors and between centers of upper and lower water tappings, exact heights and widths, etc., see next page.

*Add ½ inch to length for each bushing.

Corto Radiators are furnished, upon special order, with 6-inch legs or legless.